



# SPRAY WASH CABINETS

Water Cleaning, Low Cost, Eco-Friendly, Heavy Duty,  
Non-Damaging



50030V



750V



50030VS



750VS



4052V



6060/2566/3566V



5040/2554/3554V





## ABOUT US

**Standard Lift & Equipment, Inc. is a family owned wholesale company specializing in the wholesale of quality spray wash cabinets at low prices with a factory that has been building the spray wash cabinets since 2000. Our spray wash cabinets use Schneider, ABB, Omron, and Emerson's quality electrical products alongside other electrical products with CE certificates to ensure the excellent quality of our spray wash cabinet is enduring and can operate reliably for a long time.**

**Our spray wash cabinets have obtained CE certification, which can meet the needs of more customers in Europe and North America. We carefully listen to customers' feedback, actively communicate with customers, adopt suggestions from clients, actively improve our product design, and improve product quality and user experience so that more customers can use and enjoy our products.**

**We always provide affordable and high-quality products to customers and have replacement parts stocked whenever you need a repair.**

# SWE SERIES OVERVIEW

1. 24VAC safety voltage button control panel
2. Automatic power-off when the heater is broken
3. 7-day/24-hour programmable timer: Allows the heater to start before work starts, preheating the water and saving time. (T & TA ONLY)
4. Vertical 304 stainless steel water pump: Resists corrosion from cleaning agents, offers a long service life, is rust-proof, and does not contaminate parts.
5. Premium watertight plug and socket: Ensures a secure power cord connection.
6. Removable two-stage filter screen: Filters out larger particles, protecting the pump & keeping it easy to clean.
7. Stainless steel electrode-type liquid level probe: Rust-resistant and maintenance-free.
8. Chain and sprocket drive for the turntable: Long service life.
9. Dual bearings on the turntable ensure smooth operation.
10. Adjustable thermostat (0-90°C/32-194°F) adjusts to the appropriate water temperature in different seasons, saving energy.  
In freezing areas during winter, the temperature can be adjusted to 20°C at night to prevent freezing and protect the pump and heaters.
11. Removable waste oil recovery tank: Recycles skimmer waste oil, protecting the environment.
12. High-temperature-resistant door seal: Reduces hot water splashing and steam overflow, protecting personnel and saving energy.
13. Removable parts tree and small parts tray
14. Heavy-duty rubber casters (50030V, 50030VS, 750V, 750VS)
15. Powder coat finish
16. Premium solenoid water valve automatically fills tank with water upon startup and automatically refills when water is low. (TA ONLY)
17. Turntable jog is convenient for loading & unloading parts
18. CE certified

# SWE 3 PHASE PARTS WASHERS

## 50030V

CE

The SWE-50030V series is built with repair shops in mind, particularly those working on transmissions and automotive systems. Its design includes cut-away sides at the base, allowing engine cranes to easily access the 1,250 lb. capacity rotary wash turntable for smooth part loading and unloading. A durable 12-gauge steel cabinet and door ensure reliable performance, while its straightforward controls make it a practical choice for busy professionals.



OIL SKIMMER & WASTE OIL  
CONTAINER



50030V  
50030V-T



50030V-TA

CE

## SPECIFICATIONS

Model	SWE-50030V	SWE-50030V-T	SWE-50030V-TA
Overall Height	66" (1676mm)	66" (1676mm)	66" (1676mm)
Working Height	40" (1016mm)	40" (1016mm)	40" (1016mm)
Inside Width	32" (812mm)	32" (812mm)	32" (812mm)
Turntable Diameter	30" (762mm)	30" (762mm)	30" (762mm)
Load Capacity	1,250 lbs. (568kg)	1,250 lbs. (568kg)	1,250 lbs. (568kg)
Water Temperature	135°F – 194°F (57°C - 90°C)	135°F – 194°F (57°C - 90°C)	135°F – 194°F (57°C - 90°C)
Tank Capacity	65 Gallons (245L)	65 Gallons (245L)	65 Gallons (245L)
Turntable Jog Switch	Included	Included	Included
Low Water auto Shut-off	Included	Included	Included
Broken heater alarm & auto shut-off	Included	Included	Included
Waste Oil Recycling Container	Included	Included	Included
Heavy Duty Casters	Included	Included	Included
Electrical Control Box	Stainless steel	Stainless steel	Stainless steel
Watertight Plug & Receptacle	Included	Included	Included
Sprocket Drive	Included	Included	Included
7 Day 24 Hour Timer	Not Included	Included	Included
Water Auto Refill System	Not Included	Not Included	Included
Removable Tank Filter	Included	Included	Included
Oil Skimmer	Stainless steel	Stainless steel	Stainless steel
Small Parts Basket	Included	Included	Included
Removable Parts Tree	Included	Included	Included
Handle & Latch	Stainless steel	Stainless steel	Stainless steel
Heater Element	3x3kW	3x3kW	3x3kW
Water Pump	2.2kW	2.2kW	2.2kW
Turntable Motor	90W	90W	90W
Oil Skimmer Motor	25W	25W	25W
Stainless Steel Nozzles	19	19	19
Pump Output	38PSI	38PSI	38PSI
Wash & Skimmer Cycle Timers	0-300 Minutes	0-300 Minutes	0-300 Minutes
Power Requirement	200-415V AC / 3PH / 50/60HZ	200-415V AC / 3PH / 50/60HZ	200-415V AC / 3PH / 50/60HZ
Steel Construction	2.65mm Thickness	2.65mm Thickness	2.65mm Thickness
Shipping Weight & Dimensions	46" x 46" x 73" 800 lbs. (1168mm x 1168mm x 1854mm 400kg)	46" x 46" x 73" 800 lbs. (1168mm x 1168mm x 1854mm 400kg)	46" x 46" x 73" 800 lbs. (1168mm x 1168mm x 1854mm 400kg)

Contents of catalog subject to change without notice

CE

# SWE 3 PHASE PARTS WASHERS


## 750V-30

CE

For shops handling larger components, the SWE-750V-30 series offers additional capability. With a 54-inch interior height, it can accommodate everything from small engine parts to light-duty diesel blocks. Its rotary turntable also includes a jog feature for precise positioning, while cut-away sides simplify the lifting process with engine cranes. This makes it particularly suited for truck and transmission repair centers.



OIL SKIMMER & WASTE OIL  
CONTAINER

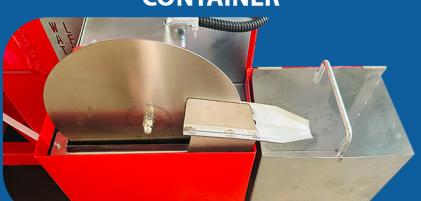

24V AC  
CONTROL  
PANEL



750V-30  
750V-30-T

CE



750V-30-TA

## SPECIFICATIONS

Model	SWE-750V-30	SWE-750V-30-T	SWE-750V-30-TA
Overall Height	78" (1981mm)	78" (1981mm)	78" (1981mm)
Working Height	50" (1270mm)	50" (1270mm)	50" (1270mm)
Inside Width	32" (812mm)	32" (812mm)	32" (812mm)
Turntable Diameter	30" (762mm)	30" (762mm)	30" (762mm)
Load Capacity	1,250 lbs. (565kg)	1,250 lbs. (565kg)	1,250 lbs. (565kg)
Water Temperature	135°F – 194°F (57°C - 90°C)	135°F – 194°F (57°C - 90°C)	135°F – 194°F (57°C - 90°C)
Tank Capacity	68 Gallons (256L)	68 Gallons (256L)	68 Gallons (256L)
Turntable Jog Switch	Included	Included	Included
Low Water auto Shut-off	Included	Included	Included
Broken heater alarm & auto shut-off	Included	Included	Included
Waste Oil Recycling Container	Included	Included	Included
Heavy Duty Casters	Included	Included	Included
Electrical Control Box	Stainless steel	Stainless steel	Stainless steel
Watertight Plug & Receptacle	Included	Included	Included
Sprocket Drive	Included	Included	Included
7 Day 24 Hour Timer	Not Included	Included	Included
Water Auto Refill System	Not Included	Not Included	Included
Removable Tank Filter	Included	Included	Included
Oil Skimmer	Stainless steel	Stainless steel	Stainless steel
Small Parts Basket	Included	Included	Included
Removable Parts Tree	Included	Included	Included
Handle & Latch	Stainless steel	Stainless steel	Stainless steel
Heater Element	3x3kW	3x3kW	3x3kW
Water Pump	2.2kW	2.2kW	2.2kW
Turntable Motor	90W	90W	90W
Oil Skimmer Motor	25W	25W	25W
Stainless Steel Nozzles	22	22	22
Pump Output	38PSI	38PSI	38PSI
Wash & Skimmer Cycle Timers	0-300 Minutes	0-300 Minutes	0-300 Minutes
Power Requirement	200-415V AC / 3PH / 50/60HZ	200-415V AC / 3PH / 50/60HZ	200-415V AC / 3PH / 50/60HZ
Stainless Steel Construction	2.65mm Thickness	2.65mm Thickness	2.65mm Thickness
Shipping Weight & Dimensions	46" x 46" x 83" 1000 lbs. (1168mm x 1168mm x 2108mm 460kg)	46" x 46" x 83" 1000 lbs. (1168mm x 1168mm x 2108mm 460kg)	46" x 46" x 83" 1000 lbs. (1168mm x 1168mm x 2108mm 460kg)

Contents of catalog subject to change without notice

CE

# SWE 3 PHASE PARTS WASHERS

## 50030VS

CE

**When corrosion resistance is a top priority, the SWE-50030VS series delivers. Constructed entirely from heavy-duty stainless steel, these machines offer improved resistance to rust and chemical wear, extending service life even in demanding environments. A 1,250 lb. load turntable and robust stainless steel cabinet construction make this series ideal for transmission centers, automotive repair shops, and smaller processing facilities that require durability and long-term reliability.**



OIL SKIMMER &  
WASTE OIL  
CONTAINER



24V AC  
CONTROL  
PANEL



50030VS  
50030VS-T

CE



50030VS-TA

## SPECIFICATIONS

Model	SWE-50030VS	SWE-50030VS-T	SWE-50030VS-TA
Overall Height	66" (1676mm)	66" (1676mm)	66" (1676mm)
Working Height	40" (1016mm)	40" (1016mm)	40" (1016mm)
Inside Width	32" (812mm)	32" (812mm)	32" (812mm)
Turntable Diameter	30" (762mm)	30" (762mm)	30" (762mm)
Load Capacity	1,250 lbs. (568kg)	1,250 lbs. (568kg)	1,250 lbs. (568kg)
Water Temperature	135°F – 194°F (57°C - 90°C)	135°F – 194°F (57°C - 90°C)	135°F – 194°F (57°C - 90°C)
Tank Capacity	65 Gallons (245L)	65 Gallons (245L)	65 Gallons (245L)
Turntable Jog Switch	Included	Included	Included
Low Water auto Shut-off	Included	Included	Included
Broken heater alarm & auto shut-off	Included	Included	Included
Waste Oil Recycling Container	Included	Included	Included
Heavy Duty Casters	Included	Included	Included
Electrical Control Box	Stainless steel	Stainless steel	Stainless steel
Watertight Plug & Receptacle	Included	Included	Included
Sprocket Drive	Included	Included	Included
7 Day 24 Hour Timer	Not Included	Included	Included
Water Auto Refill System	Not Included	Not Included	Included
Removable Tank Filter	Stainless steel	Stainless steel	Stainless steel
Oil Skimmer	Stainless steel	Stainless steel	Stainless steel
Small Parts Basket	Stainless steel	Stainless steel	Stainless steel
Removable Parts Tree	Stainless steel	Stainless steel	Stainless steel
Handle & Latch	Stainless steel	Stainless steel	Stainless steel
Heater Element	3x3kW	3x3kW	3x3kW
Water Pump	2.2kW	2.2kW	2.2kW
Turntable Motor	90W	90W	90W
Oil Skimmer Motor	25W	25W	25W
Stainless Steel Nozzles	19	19	19
Pump Output	38PSI	38PSI	38PSI
Wash & Skimmer Cycle Timers	0-300 Minutes	0-300 Minutes	0-300 Minutes
Power Requirement	200-415V AC / 3PH / 50/60HZ	200-415V AC / 3PH / 50/60HZ	200-415V AC / 3PH / 50/60HZ
Steel Construction	2.65mm Thickness	2.65mm Thickness	2.65mm Thickness
Shipping Weight & Dimensions	46" x 46" x 73" 900 lbs. (1168mm x 1168mm x 1854mm 409kg)	46" x 46" x 73" 900 lbs. (1168mm x 1168mm x 1854mm 409kg)	46" x 46" x 73" 900 lbs. (1168mm x 1168mm x 1854mm 409kg)

Contents of catalog subject to change without notice

CE

# SWE 3 PHASE PARTS WASHERS

## 750VS-30

CE

## SPECIFICATIONS

CE

Similarly, the SWE-750VS-30 series provides stainless steel construction tailored for larger-scale applications such as truck transmission centers and light industrial facilities. Equipped with a 1,250 lb. rotary wash turntable and built from 12-gauge stainless steel, it ensures both strength and extended lifespan. Its corrosion-resistant design makes it a cost-effective investment for businesses seeking reliable cleaning performance on heavy truck components.



750VS-30  
750VS-30-T



750VS-30-TA



OIL SKIMMER &  
WASTE OIL  
CONTAINER



24V AC  
CONTROL  
PANEL

Model	SWE-750VS-30	SWE-750VS-30-T	SWE-750VS-30-TA
Overall Height	78" (1981mm)	78" (1981mm)	78" (1981mm)
Working Height	50" (1270mm)	50" (1270mm)	50" (1270mm)
Inside Width	32" (812mm)	32" (812mm)	32" (812mm)
Turntable Diameter	30" (762mm)	30" (762mm)	30" (762mm)
Load Capacity	1,250 lbs. (565kg)	1,250 lbs. (565kg)	1,250 lbs. (565kg)
Water Temperature	135°F – 194°F (57°C - 90°C)	135°F – 194°F (57°C - 90°C)	135°F – 194°F (57°C - 90°C)
Tank Capacity	68 Gallons (256L)	68 Gallons (256L)	68 Gallons (256L)
Turntable Jog Switch	Included	Included	Included
Low Water auto Shut-off	Included	Included	Included
Broken heater alarm & auto shut-off	Included	Included	Included
Waste Oil Recycling Container	Included	Included	Included
Heavy Duty Casters	Included	Included	Included
Electrical Control Box	Stainless steel	Stainless steel	Stainless steel
Watertight Plug & Receptacle	Included	Included	Included
Sprocket Drive	Included	Included	Included
7 Day 24 Hour Timer	Not Included	Included	Included
Water Auto Refill System	Not Included	Not Included	Included
Removable Tank Filter	Stainless steel	Stainless steel	Stainless steel
Oil Skimmer	Stainless steel	Stainless steel	Stainless steel
Small Parts Basket	Stainless steel	Stainless steel	Stainless steel
Removable Parts Tree	Stainless steel	Stainless steel	Stainless steel
Handle & Latch	Stainless steel	Stainless steel	Stainless steel
Heater Element	3x3kW	3x3kW	3x3kW
Water Pump	2.2kW	2.2kW	2.2kW
Turntable Motor	90W	90W	90W
Oil Skimmer Motor	25W	25W	25W
Stainless Steel Nozzles	22	22	22
Pump Output	38PSI	38PSI	38PSI
Wash & Skimmer Cycle Timers	0-300 Minutes	0-300 Minutes	0-300 Minutes
Power Requirement	200-415V AC / 3PH / 50/60HZ	200-415V AC / 3PH / 50/60HZ	200-415V AC / 3PH / 50/60HZ
Stainless Steel Construction	2.65mm Thickness	2.65mm Thickness	2.65mm Thickness
Shipping Weight & Dimensions	46" x 46" x 83" 1000 lbs. (1168mm x 1168mm x 2108mm 460kg)	46" x 46" x 83" 1000 lbs. (1168mm x 1168mm x 2108mm 460kg)	46" x 46" x 83" 1000 lbs. (1168mm x 1168mm x 2108mm 460kg)

Contents of catalog subject to change without notice

CE

# HEAVY DUTY SWE PARTS WASHERS

4052V

## SPECIFICATIONS

Model	SWE-4052V	SWE-4052V-T	SWE-4052V-TA
Overall Height	78" (1981mm)	78" (1981mm)	78" (1981mm)
Working Height	52" (1320mm)	52" (1320mm)	52" (1320mm)
Inside Width	42" (1060mm)	42" (1060mm)	42" (1060mm)
Turntable Diameter	40" (1000mm)	40" (1000mm)	40" (1000mm)
Load Capacity	2000lbs. (900kg)	2000lbs. (900kg)	2000lbs. (900kg)
Water Temperature	135°F – 194°F (57°C - 90°C)	135°F – 175°F (57°C - 80°C)	135°F – 175°F (57°C - 80°C)
Tank Capacity	115 Gallons (435L)	115 Gallons (435L)	115 Gallons (435L)
Turntable Jog Switch	Included	Included	Included
Low Water auto Shut-off	Included	Included	Included
Broken heater alarm & auto shut-off	Included	Included	Included
Waste Oil Recycling Container	Included	Included	Included
Heavy Duty Casters	Included	Included	Included
Electrical Control Box	Stainless steel	Stainless steel	Stainless steel
Watertight Plug & Receptacle	Included	Included	Included
Sprocket Drive	Included	Included	Included
7 Day 24 Hour Timer	Not Included	Included	Included
Water Auto Refill System	Not Included	Not Included	Included
Removable Tank Filter	Included	Included	Included
Oil Skimmer	Stainless steel	Stainless steel	Stainless steel
Small Parts Basket	Included	Included	Included
Removable Parts Tree	Included	Included	Included
Handle & Latch	Stainless steel	Stainless steel	Stainless steel
Heater Element	3x3kW	3x3kW	3x3kW
Water Pump	4kW	4kW	4kW
Turntable Motor	90W	90W	90W
Oil Skimmer Motor	25W	25W	25W
Stainless Steel Nozzles	26	26	26
Pump Output	51PSI	51PSI	51PSI
Wash & Skimmer Cycle Timers	0-300 Minutes	0-300 Minutes	0-300 Minutes
Power Requirement	200-415V AC / 3PH / 50/60HZ	200-415V AC / 3PH / 50/60HZ	200-415V AC / 3PH / 50/60HZ
Steel Construction	2.65mm Thickness	2.65mm Thickness	2.65mm Thickness
Shipping Weight & Dimensions	46" x 46" x 83" 1000 lbs. (1168mm x 1168mm x 2108mm 460kg)	46" x 46" x 83" 1000 lbs. (1168mm x 1168mm x 2108mm 460kg)	46" x 46" x 83" 1000 lbs. (1168mm x 1168mm x 2108mm 460kg)

Contents of catalog subject to change without notice

CE

For extra-large parts, the SWE-4052V series is designed with a 52-inch working height, a 40-inch diameter rotary turntable, and the ability to handle loads of up to 2,000 lbs. Its heavy-duty design accommodates larger parts than the previous models. A 4kW stainless steel pump circulates hot water up to 90°C, with dual filtration to protect the system, while stainless steel nozzles and an oil skimmer enhance cleaning efficiency and water recycling.



4052V  
4052V-T



4052V-TA



OIL SKIMMER &  
WASTE OIL CONTAINER

CE

# HEAVY DUTY SWE PARTS WASHERS

5040/2554/3554V

## SPECIFICATIONS

Model	SWE-5040V/25	SWE-5040V/35	SWE-2554V	SWE-3554V
Overall Height	66" (1676mm)	66" (1676mm)	66" (1676mm)	66" (1676mm)
Working Height	40" (1000mm)	40" (1000mm)	40" (1000mm)	40" (1000mm)
Turntable Diameter	50" (1250mm)	50" (1250mm)	50" (1250mm)	50" (1250mm)
Load Capacity	2,500 lbs. (1100kg)	3,300 lbs. (1500kg)	2,500 lbs. (1100kg)	3,300 lbs. (1500kg)
Water Temperature	135°F – 194°F (57°C - 90°C)	135°F – 195°F (57°C - 90°C)	135°F – 195°F (57°C - 90°C)	135°F – 195°F (57°C - 90°C)
Tank Capacity	110 Gallons (420L)	110 Gallons (420L)	110 Gallons (420L)	110 Gallons (420L)
Turntable Jog Switch	Included	Included	Included	Included
Low Water auto Shut-off	Included	Included	Included	Included
Broken heater alarm & auto shut-off	Included	Included	Included	Included
Waste Oil Recycling Container	Included	Included	Included	Included
Electrical Control Box	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Watertight Plug & Receptacle	Included	Included	Included	Included
Sprocket Drive	Included	Included	Included	Included
7 Day 24 Hour Timer	Included	Included	Included	Included
Water Auto Refill System	Not Included	Not Included	Included	Included
Removable Tank Filter	Included	Included	Included	Included
Oil Skimmer	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Small Parts Basket	Included	Included	Included	Included
Removable Parts Tree	Included	Included	Included	Included
Handle & Latch	Included	Included	Included	Included
Heater Element	3x6kW	3x6kW	3x6kW	3x6kW
Water Pump	7.5kW	7.5kW	7.5kW	7.5kW
Turntable Motor	120W	120W	120W	120W
Oil Skimmer Motor	25W	25W	25W	25W
Stainless Steel Nozzles	50	50	50	50
Pump Output	140GPM at 76PSI	140GPM at 76PSI	140GPM at 76PSI	140GPM at 76PSI
Wash & Skimmer Cycle Timers	0-300 Minutes	0-300 Minutes	0-300 Minutes	0-300 Minutes
Power Requirement	200-415V AC / 3ph 50/60Hz	200-415V AC / 3ph / 50/60Hz	200-415V AC / 3ph / 50/60Hz	200-415V AC / 3ph / 50/60Hz
Steel Construction	4mm Thickness	4mm Thickness	4mm Thickness	4mm Thickness
Shipping Weight & Dimensions	73" x 78" x 70" 2500 lbs. (1854mm x 1981mm x 1778mm 1100kg)	73" x 78" x 70" 2500 lbs. (1854mm x 1981mm x 1778mm 1100kg)	73" x 79" x 71" 2500 lbs. (1854mm x 2007mm x 1803mm 1100kg)	73" x 79" x 71" 2500 lbs. (1854mm x 2007mm x 1803mm 1100kg)

The SWE-5040, SWE-2554, and SWE-3554 series focus on high-capacity cleaning, featuring a 40-inch work height, a 50-inch diameter rotary turntable, and load capacities up to 3,500 lbs. Their rugged 4mm steel construction includes a V-gap design on top, enabling cranes or forklifts to position heavy parts with ease. Depending on the model, they are fitted with a 7.5kW stainless steel pump that can deliver hot water up to 90°C. Like other models, stainless steel nozzles and an oil skimmer support thorough cleaning and water reuse.



5040



2554/3554



OIL SKIMMER &  
WASTE OIL CONTAINER

Contents of catalog subject to change without notice

CE

CE

# HEAVY DUTY SWE PARTS WASHERS

6060/2566/3566V

## SPECIFICATIONS

Model	SWE-6060V/25	SWE-6060V/35	SWE-2566V	SWE-3566V
Overall Height	86" (2185mm)	86" (2185mm)	86" (2185mm)	86" (2185mm)
Working Height	60" (1500mm)	60" (1500mm)	60" (1500mm)	60" (1500mm)
Turntable Diameter	60" (1500mm)	60" (1500mm)	60" (1500mm)	60" (1500mm)
Load Capacity	2,500 lbs. (1100kg)	3,300 lbs. (1500kg)	2,500 lbs. (1100kg)	3,300 lbs. (1500kg)
Water Temperature	135°F - 194°F (57°C - 90°C)	60° - 194°F (15°C - 90°C)	135° - 194°F (57° - 90°C)	135° - 194°F (57° - 90°C)
Tank Capacity	160 Gallons (600L)	160 Gallons (600L)	160 Gallons (600L)	160 Gallons (600L)
Turntable Jog Switch	Included	Included	Included	Included
Low Water auto Shut-off	Included	Included	Included	Included
Broken heater alarm & auto shut-off	Included	Included	Included	Included
Waste Oil Recycling Container	Included	Included	Included	Included
Electrical Control Box	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Watertight Plug & Receptacle	Included	Included	Included	Included
Sprocket Drive	Included	Included	Included	Included
7 Day 24 Hour Timer	Included	Included	Included	Included
Water Auto Refill System	Not Included	Not Included	Included	Included
Removable Tank Filter	Included	Included	Included	Included
Oil Skimmer	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Small Parts Basket	Included	Included	Included	Included
Removable Parts Tree	Included	Included	Included	Included
Handle & Latch	Included	Included	Included	Included
Heater Element	3x6kW	3x6kW	3x6kW	3x6kW
Water Pump	11kW	11kW	11kW	11kW
Turntable Motor	120W	120W	120W	120W
Oil Skimmer Motor	25W	25W	25W	25W
Stainless Steel Nozzles	52	52	52	52
Pump Output	140GPM at 97PSI	140GPM at 97PSI	140GPM at 97PSI	140GPM at 97PSI
Wash & Skimmer Cycle Timers	0-300 Minutes	0-300 Minutes	0-300 Minutes	0-300 Minutes
Power Requirement	200-415V AC, 3PH, 50/60HZ			
Steel Construction	4mm Thickness	4mm Thickness	4mm Thickness	4mm Thickness
Shipping Weight & Dimensions	89" x 88" x 80" 3300 lbs. (2261mm x 2235mm x 2032mm 1550kg)	89" x 88" x 80" 3300 lbs. (2261mm x 2235mm x 2032mm 1550kg)	89" x 89" x 81" 3300 lbs. (2261mm x 2261mm x 2057mm 1550kg)	89" x 89" x 81" 3300 lbs. (2261mm x 2261mm x 2057mm 1550kg)

Contents of catalog subject to change without notice

CE

The SWE-6060V, SWE-2566V, and SWE-3566V series represent the heavy-duty end of the lineup. With a 60-inch working height, a 60-inch rotary turntable, and a maximum load capacity of 3,500 lbs, they are engineered for the largest parts and assemblies, from diesel engines to construction equipment. A 11kW stainless steel pump ensures powerful water circulation at temperatures up to 90°C. These units also incorporate two-stage filtration, stainless steel spray nozzles, and oil skimming technology, delivering maximum efficiency for industrial-scale cleaning tasks.



6060V/25  
6060V/35



+1 877-238-2095

10505 VALLEY BLVD, STE 308, EL MONTE, CA 91731, USA

# SWC 1 PHASE PARTS WASHERS

750VS-30/50030VS

CE

For smaller facilities that lack access to three-phase power, the SWC-50030VS and SWC-750VS-30 series provide the perfect alternative. Functionally identical to their SWE stainless steel counterparts, these models retain the same heavy-duty construction, 1,250 lb. rotary wash turntables, and corrosion-resistant design. The key difference is their single-phase power configuration, making them well-suited for small workshops or repair centers that require professional-grade cleaning performance without the infrastructure of a larger industrial site.



OIL SKIMMER &  
WASTE OIL  
CONTAINER



CE

## SPECIFICATIONS

Model	SWC-50030VS	SWC-50030VS-T	SWC-750VS-30	SWC-750VS-30-T
Overall Height	66" (1676mm)	66" (1676mm)	78" (1981mm)	78" (1981mm)
Working Height	40" (1016mm)	40" (1016mm)	50" (1270mm)	50" (1270mm)
Inside Width	32" (812mm)	32" (812mm)	32" (812mm)	32" (812mm)
Turntable Diameter	30" (762mm)	30" (762mm)	30" (762mm)	30" (762mm)
Load Capacity	1,250 lbs. (568kg)	1,250 lbs. (568kg)	1,250 lbs. (565kg)	1,250 lbs. (565kg)
Water Temperature	135°F – 194°F (57°C - 90°C)	135°F – 195°F (57°C - 90°C)	135°F – 195°F (57°C - 90°C)	135°F – 195°F (57°C - 90°C)
Tank Capacity	65 Gallons (245L)	65 Gallons (245L)	68 Gallons (256L)	68 Gallons (256L)
Turntable Jog Switch	Included	Included	Included	Included
Low Water auto Shut-off	Included	Included	Included	Included
Broken heater alarm & auto shut-off	Included	Included	Included	Included
Waste Oil Recycling Container	Included	Included	Included	Included
Heavy Duty Casters	Included	Included	Included	Included
Electrical Control Box	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Watertight Plug & Receptacle	Included	Included	Included	Included
Sprocket Drive	Included	Included	Included	Included
7 Day 24 Hour Timer	Not Included	Included	Not Included	Included
Water Auto Refill System	Not Included	Not Included	Not Included	Not Included
Removable Tank Filter	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Oil Skimmer	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Small Parts Basket	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Removable Parts Tree	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Handle & Latch	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Heater Element	3x3kW	3x3kW	3x3kW	3x3kW
Water Pump	2.2kW	2.2kW	2.2kW	2.2kW
Turntable Motor	90W	90W	90W	90W
Oil Skimmer Motor	25W	25W	25W	25W
Stainless Steel Nozzles	19	19	22	22
Pump Output	38PSI	38PSI	38PSI	38PSI
Wash & Skimmer Cycle Timers	0-300 Minutes	0-300 Minutes	0-300 Minutes	0-300 Minutes
Power Requirement	208-240V AC, 1PH, 50/60HZ	208-240V AC, 1PH, 50/60HZ	208-240V AC, 1PH, 50/60HZ	208-240V AC, 1PH, 50/60HZ
Steel Construction	2.65mm Thickness	2.65mm Thickness	2.65mm Thickness	2.65mm Thickness
Shipping Weight & Dimensions	46" x 46" x 73" 900 lbs. (1168mm x 1168mm x 1854mm 409kg)	46" x 46" x 73" 900 lbs. (1168mm x 1168mm x 1854mm 409kg)	46" x 46" x 83" 1000 lbs. (1168mm x 1168mm x 2108mm 460kg)	46" x 46" x 83" 1000 lbs. (1168mm x 1168mm x 2108mm 460kg)

Contents of catalog subject to change without notice

CE